

Resource Management

Protecting your Drinking Water

INTRODUCTION:

In almost any town, a large variety of chemicals and wastes are used or disposed of in day-to-day life. We are now learning that if things like gasoline, road salt, pesticides or sewage are not used or discarded wisely, they can contaminate a town's water supply.

We are also learning that some sources of water are easier to contaminate than other sources. Whether or not your town's supply is *vulnerable* to contamination depends on many different factors. These factors may add together to protect the supply, or to leave it very vulnerable to contamination.

To estimate the vulnerability of the ground water flowing under an area of land, a *hydrogeologist* measures several factors which affect how quickly rain water moves through the ground in that area. Pollutants will usually move in the same way as rain water.


Once you know something about each of these factors, you will be able to decide what must be done to be sure your drinking water will always be safe.

OBJECTIVE:

In this activity, you will use a simple mathematical model of *ground water vulnerability* to estimate the vulnerability of a small town's water supply.

| Table 1 | | | |
|---|--|--|--|
| Estimated Value of Five Factors Affecting | | | |
| Groundwater Vulnerability | | | |
| | | | |

| FACTOR | VALUE |
|--|--|
| 1. Yearly Rainfall (Total amount of rain that falls in one year) | 3if more than 40 in. 2if from 15 to 40 in. 1if less than 15 in. |
| 2. Depth to Water (Vertical depth from surface to aquifer) | 3if less than 10 ft. 2if from 10 to 75 ft. 1if greater than 75 ft. |
| 3. Aquifer Type (Type of soil/rock aquifer passes through) | 3if sand or gravel 2if limestone 1if bedrock |
| 4. Soil Type (Main type of soil and rock above aquifer) | 4if sand or gravel 3if limestone 2if loam or silt 1if clay or shale |
| 5. Lay of the Land (The general slope of surface of the land) | 3if flat 2if gently rolling hills 1if steep hills/mountains |

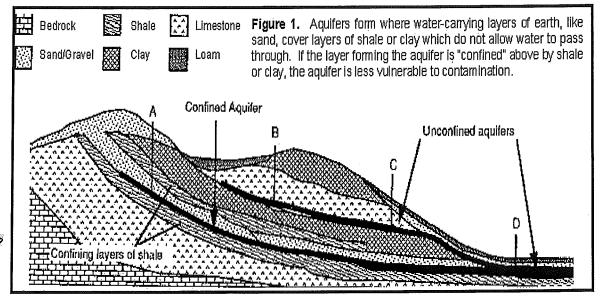



MODEL OF GROUND WATER VULNERABILITY:

There are many factors affecting the vulnerability of a water supply, but we will only look at the five factors described in Table 1. A value of 1 means it is harder for rain water (and pollutants) to reach the supply, while a value of 3 means it is easier. It may be easy to see that the greater the depth to water, the longer it will take rain water to reach the supply. But how does a steep slope make the area less vulnerable? Figure 1 shows how some of these factors affect the vulnerability of various aguifers.

DIRECTIONS:

Use Table 1 to find out how many points should be given for each of the five factors.

For example, Table 1 tells you that if the depth to water is less than 15 ft, you should give 3 points for this factor in Quadrant 1. Values from Table 1 may be averaged.


Fill in the rest of the blanks for each factor, then add them up to find the vulnerability of each quadrant.

| | | | |
|---------------------|----------------|-----|--|
| Table 2 | | | |
| Quadrant 1 | | | |
| Depth to Water | 12ft | 3 | |
| Yearly Rainfall | 45" | | |
| Aquifer Type | Sand/Gravel | F | |
| Soil Type | Loam/Sand | | |
| Lay of the Land | Flat | - | |
| VULNERABILITY SCORE | | | |
| Quadrant 2 | | | |
| Depth to Water | 40ft | | |
| Yearly Rainfall | 45" | _ | |
| Aquifer Type | Limestone | | |
| Soil Type | Limestone/Loam | | |
| | | | |
| Lay of the Land | | | |
| VULNERABILITY SCORE | | | |
| Quadrant 3 | 004 | | |
| Depth to Water | 60ft | | |
| Yearly Rainfall | 38" | | |
| Aquifer Type | Limestone | | |
| Soil Type | Limestone/Clay | | |
| Lay of the Land | Rolling Hills | | |
| , | RABILITY SCORE | | |
| Quadrant 4 | 100ft | | |
| Depth to Water | | | |
| Yearly Rainfall | 34" | | |
| Aquifer Type | Sand/Gravel | | |
| Soil Type | Shale/Clay | | |
| Lay of the Land | Steep Hills | | |
| VULNEF | RABILITY SCORE | - 1 | |

HOW TO USE THE MODEL:

You can get a rough idea of the <u>vulnerability</u> of the underlying aquifer in each of Priceford's four quadrants. By using these five factors to give each quadrant a "score" on how easy it would be for a pollutant to pass through the ground to contaminate the aquifer

Follow the instructions for filling out **Table 2**, then use your results along with the map of the Priceford area to answer the questions at the bottom of the page. **Give your reasons for each answer!**



OUESTIONS:

- 1. Discuss how factors 2-5 described in Table 1 affect the vulnerability of water supplies at Points B, C and D in Figure 1. If three towns get their water supplies at Points B, C and D, which supply would be the most vulnerable? The least vulnerable?
- 2. Use Table 3 below to interpret the vulnerability scores you calculated in Table 2. Which town's water supply would be most likely to be contaminated if a larger tanker truck full of a toxic chemical spilled its contents during a traffic accident on the nearest road?
- 3. Compare the vulnerability values you calculated in the four towns in the above map to Points A, B, C and D in Figure 1. Which of these towns is most likely to be located at which of these Points?
- 4. How would one town's pollutants affect the other town's supplies? If a wood preserving chemical is found in Smalltown's water, but not in Riverville's, where is the most likely area where the source of contamination might be found?

